





PLAIN WELD ENDED BUTTERFLY VALVE 316

	1"	1.5"	2"	2.5"	3"	4"	6"
Stock Code	2100910	2100915	2100920	2100925	2100930	2100940	2100941
ØA	22.1	34.8	47.5	60.2	72.9	97.4	146.8
ØB	25.4	38.1	50.8	63.5	76.2	101.6	152.4
D	34	38	40	40	41	44	40
ØE	79	85	105	112	125	157	216.5
L	61	64.3	74.3	77.6	84.8	101.7	132.5

ALTERNATIVE ENDS OF YOUR CHOICE CAN BE FITTED.


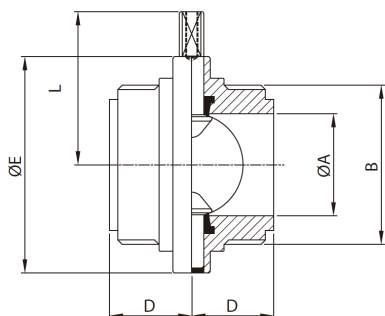


RJT MALE x MALE BUTTERFLY VALVE 316

	1"	1.5"	2"	2.5"	3"	4"
Stock Code	2100810	2100815	2100820	2100825	2100830	2100840
ØA	22.2	34.82	47.52	60.2	72.9	97.69
B	45.72 x 8T WHIT	58.42 x 8T WHIT	72.72 x 6T WHIT	85.42 x 6T WHIT	98.12 x 6T WHIT	123.52 x 6T WHIT
D	34	38	40	40	41	50
ØE	79	85	105	112	125	157
L	61	64.3	74.3	77.6	84.8	101.75

- STOCKED FROM 1" OD - 6" OD
- WELD ENDS, RJT MALE X MALE, FERRULE ENDS AVAILABLE EX STOCK
- ALTERNATIVE ENDS OF YOUR CHOICE CAN BE FITTED.
- EPDM SEAL AS STANDARD - VITON & SILICONE SEALS ALSO AVAILABLE.
- 12 POSITION PLASTIC HANDLE - C/W 304 STAINLESS STEEL GRIPPER BAR AS STANDARD. OTHER HANDLES ARE AVAILABLE - SEE PAGE 34

- **BODY:** FULLY MACHINED FROM 316 FORGING.
- **DISC:** FULLY MACHINED, HIGHLY POLISHED RA LESS THAN 0.6 µM
- **DISC DRIVE HEAD:** 8MM X 12MM (1" - 3")
12MM X 12MM (4")
16MM X 16MM (6")
- **PRESSURE:** FOR USE UP TO = 150PSI / 10BAR.

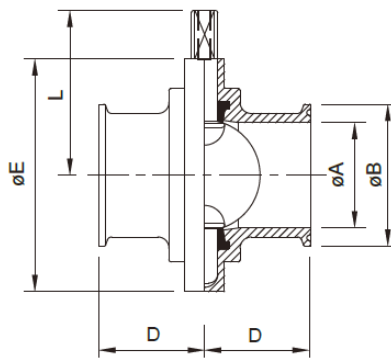

FERRULE ENDED BUTTERFLY VALVE 316

	1"	1.5"	2"	2.5"	3"	4"
Stock Code	2100893	2100894	2100895	2100896	2100897	2100898
ØA	22.1	34.8	47.5	60.2	72.2	97.6
ØB	50.5	50.5	64	77.5	91	119
D	33	33	35	35	38	38
D (WELDED)	55.5	59.5	61.5	61.5	62.5	65.5
ØE	79	85	105	112	125	157
L	61	64.3	74.3	77.6	84.8	101.7

PLEASE NOTE: IF NO STANDARD STOCK IS AVAILABLE, FERRULES WILL BE WELDED TO WELD END VALVES. THEREFORE OVERALL LENGTH WILL BE SUBJECT TO CHANGE - **SEE D (WELDED)**

IF CRITICAL, PLEASE LET US KNOW.

TORQUE FOR FULL OPEN / CLOSE.

	1"	1.5"	2"	2.5"	3"	4"	6"
Torque	< 9.8 N.m	< 9.8 N.m	13 N.m	15 N.m	20 N.m	30 N.m	65 N.m

***1KGF-M = 9.8N.M = 86.8 LBF-IN = 7.23LBF-FT**