


ANTI VIBRATION CLIP 304 - STEM

	1/2"	3/4"	1"	1.25"	1.5"	2"	2.5"	3"	4"	5"	6"	8"	10"
OD	0606050	0606055	0606060	0606063	0606065	0606070	0606075	0606080	0606085	0606090	0606095	0606096	0606098
NB	0609205	0609207	0609210	0609212	0609215	0609220	0609225	0609230	0609240	0609250	0609260	-	-
ØA - OD	12.7	19.05	25.4	32	38.1	50.8	63.5	76.2	101.6	129	154	204	254
ØA - NB	21.3	26.7	33.4	42.1	48.3	60.3	73.0	88.9	114.3	141.3	168.3	219.1	273
H	90	90	90	90	90	90	90	90	90	130	145	160	180
L	83	83	83	90	97.7	111.7	124	140.5	162	196	217	281	330
Width	25	25	25	25	25	25	25	25	25	25	25	25	25

AVAILABLE TO SUIT OD TUBE & NB PIPE.

RUBBER MAX TEMPERATURE: 100°C

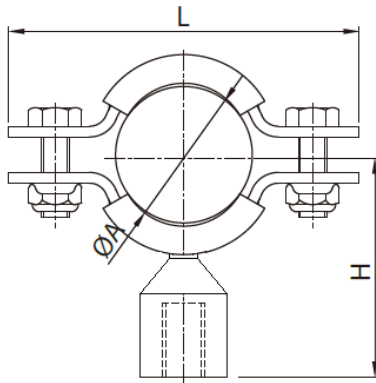

ANTI VIBRATION CLIP 304 - M10 BOSS

	1/2"	3/4"	1"	1.25"	1.5"	2"	2.5"	3"	4"	5"	6"
OD	0609100	0609105	0609110	0609115	0609120	0609135	0609140	0609145	0609149	0609155	0609160
NB	0609305	0609307	0609310	0609312	0609315	0609320	0609325	0609330	0609340	0609350	0609360
ØA - OD	12.7	19.05	25.4	32	38.1	50.8	63.5	76.2	101.6	129	154
ØA - NB	21.3	26.7	33.4	42.1	48.3	60.3	73.0	88.9	114.3	141.3	168.3
H	45	48	50	53	55	60	70	75	88	100	115
L	83	83	83	90	97.7	117.7	124	140.5	162	196	217
Boss Dia	25	25	25	25	25	25	25	25	25	25	25

RUBBER MAX TEMPERATURE: 100°C

THREADED BAR & M10 BACKING/FIXING PLATES AVAILABLE.