



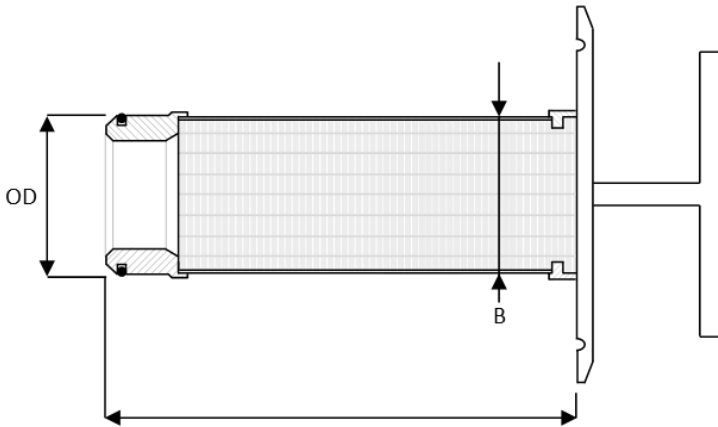

Berkeley Stainless Fittings Limited

Pump Protection Wedge Wire Element





PUMP PROTECTION ELEMENTS - WEDGE WIRE

	Stock Code	OD	A	B	APERTURE	mm	OPEN AREA %
2" Pump Element - 50 Micron	2300500	48	133	45	50µm	0.050	4.76%
2" Pump Element - 100 Micron	2300600	48	133	45	100µm	0.100	9.09%
2" Pump Element - 150 Micron	2300700	48	133	45	150µm	0.150	13.04%
2" Pump Element - 250 Micron	2300800	48	133	45	250µm	0.250	20.00%
2" Pump Element - 400 Micron	2300900	48	133	45	400µm	0.400	28.57%
2" Pump Element - 500 Micron	2301000	48	133	45	500µm	0.500	33.33%
2" Pump Element - 750 Micron	2301100	48	133	45	750µm	0.750	42.85%
2" Pump Element - 1000 Micron	2301140	48	133	45	1000µm	1.00	50.00%
2" Pump Element - 1500 Micron	2301310	48	133	45	1500µm	1.50	60.00%
2" Pump Element - 3000 Micron	2301410	48	133	45	3000µm	3.00	75.00%
3" Pump Element - 50 Micron	2300520	72	208	70	50µm	0.050	4.76%
3" Pump Element - 100 Micron	2300620	72	208	70	100µm	0.100	9.09%
3" Pump Element - 150 Micron	2300720	72	208	70	150µm	0.150	13.04%
3" Pump Element - 250 Micron	2300820	72	208	70	250µm	0.250	20.00%
3" Pump Element - 400 Micron	2300920	72	208	70	400µm	0.400	28.57%
3" Pump Element - 500 Micron	2301020	72	208	70	500µm	0.500	33.33%
3" Pump Element - 750 Micron	2301120	72	208	70	750µm	0.750	42.85%
3" Pump Element - 1000 Micron	2301220	72	208	70	1000µm	1.00	50.00%
3" Pump Element - 1500 Micron	2301320	72	208	70	1500µm	1.50	60.00%
3" Pump Element - 3000 Micron	2301420	72	208	70	3000µm	3.00	75.00%
4" Pump Element - 100 Micron	2301480	97	242	97	100µm	0.100	9.09%
4" Pump Element - 150 Micron	2301481	97	242	97	150µm	0.150	13.04%

- MANUFACTURED BY BSF - FROM 316 STAINLESS STEEL
- ELEMENT ASSEMBLY CONSISTS OF:
1 X WEDGE WIRE ELEMENT
1 X CLAMP BLANK
1 X ELEMENT SEAL (NITRILE)

- SUITABLE FOR CIP & SIP SYSTEMS.
- RIGID ELEMENTS SUITABLE FOR REVERSE FLUSHING.
- OTHER WEDGE WIRE SIZES AVAILABLE ON REQUEST.
- WEDGE WIRE ELEMENTS ARE DESIGNED TO BE USED FOTI - FLOW OUT TO IN.

DUE TO CONTINUOUS DEVELOPMENT & INNOVATION, WE RESERVE THE RIGHT TO CHANGE THE DESIGN/DIMENSIONS WITHOUT PRIOR NOTICE

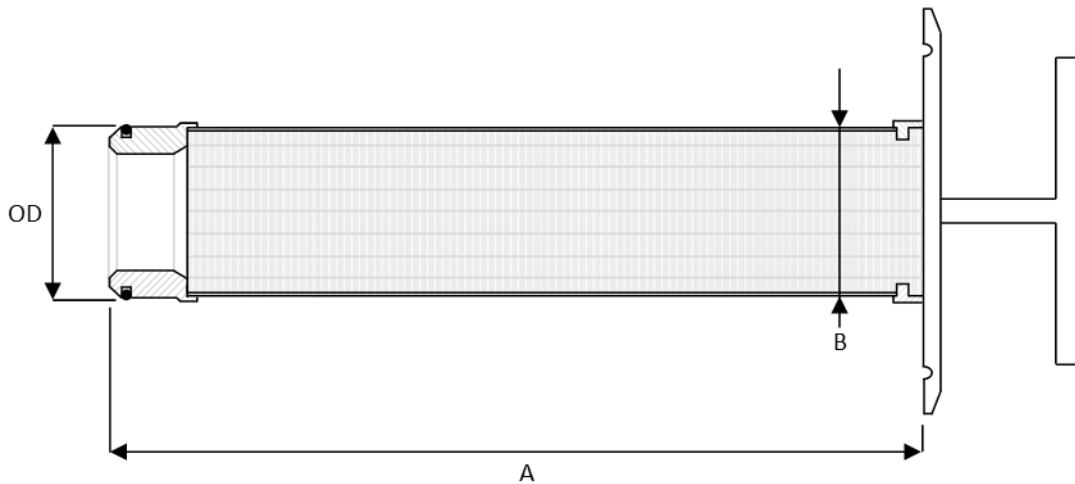

PRODUCT ELEMENTS - WEDGE WIRE

	Stock Code	OD	A	B	APERTURE	mm	OPEN AREA %
2" Product Element - 50 Micron	2340300	48	403	45	50µm	0.050	4.76%
2" Product Element - 100 Micron	2340320	48	403	45	100µm	0.100	9.09%
2" Product Element - 150 Micron	2340340	48	403	45	150µm	0.150	13.04%
2" Product Element - 250 Micron	2340360	48	403	45	250µm	0.250	20.00%
2" Product Element - 400 Micron	2340380	48	403	45	400µm	0.400	28.57%
2" Product Element - 500 Micron	2340400	48	403	45	500µm	0.500	33.33%
2" Product Element - 750 Micron	2340420	48	403	45	750µm	0.750	42.85%
2" Product Element - 1000 Micron	2340432	48	403	45	1000µm	1.00	50.00%
2" Product Element - 1500 Micron	2340434	48	403	45	1500µm	1.50	60.00%
2" Product Element - 3000 Micron	2340436	48	403	45	3000µm	3.00	75.00%
3" Product Element - 50 Micron	2340310	72	503	70	50µm	0.050	4.76%
3" Product Element - 100 Micron	2340330	72	503	70	100µm	0.100	9.09%
3" Product Element - 150 Micron	2340350	72	503	70	150µm	0.150	13.04%
3" Product Element - 250 Micron	2340370	72	503	70	250µm	0.250	20.00%
3" Product Element - 400 Micron	2340390	72	503	70	400µm	0.400	28.57%
3" Product Element - 500 Micron	2340410	72	503	70	500µm	0.500	33.33%
3" Product Element - 750 Micron	2340430	72	503	70	750µm	0.750	42.85%
3" Product Element - 1000 Micron	2340433	72	503	70	1000µm	1.00	50.00%
3" Product Element - 1500 Micron	2340435	72	503	70	1500µm	1.50	60.00%
3" Product Element - 3000 Micron	2340437	72	503	70	3000µm	3.00	75.00%

- MANUFACTURED BY BSF - FROM 316 STAINLESS STEEL
- ELEMENT ASSEMBLY CONSISTS OF:
1 X WEDGE WIRE ELEMENT
1 X CLAMP BLANK
1 X ELEMENT SEAL (NITRILE)

- SUITABLE FOR CIP & SIP SYSTEMS.
- RIGID ELEMENTS SUITABLE FOR REVERSE FLUSHING.
- OTHER WEDGE WIRE SIZES AVAILABLE ON REQUEST.
- WEDGE WIRE ELEMENTS ARE DESIGNED TO BE USED FOTI - FLOW OUT TO IN.